

eZMP-SynqNet Standalone Motion Controller

Hardware Specification

KOLLMORGEN

Because Motion Matters[™]

eZMP-SynqNet

Hardware Specification

KOLLMORGEN®

SynqNet

Key Benefits

• Maximize System Productivity

Fastest cycle times via 64-bit technology and the lowest latency, multi-axis control available. Reduced settling times with dedicated, real-time motion processor executing advanced control algorithms.

• Highest End Product Quality

Improve machine repeatability, precision, and path control with centralized motion control and real-time SynqNet motor and I/O network connectivity.

• Reduced Development Time and Cost

Integrated motion controller and industrial PC for quick peripheral integration via Ethernet, USB, VGA, serial, and PCI connectivity. SynqNet motion networks support plug-and-play hardware and provides rapid system optimization tools for motion and I/O.

• Design Flexibility

Open embedded PC architecture with Windows XPe operating system allows motion and machine control development in Visual Basic, C/C++/C#, and other third party software. Flexible software libraries and customizable control algorithms for best-fit motion performance. Operate as stand-alone control or connect to host PC or factory network.



Performance Standalone Machine and Motion Control

The eZMP integrates the full power, flexibility, and connectivity of an industrial computer with the performance of real-time, 64-bit multi-axis motion and I/O control.

Supported Features

SynqNet Motion Network Master

- Supports up to 64 axes of servo, stepper control
- Supports up to 16,000 digital and 1,000 analog I/O
- Servo update rates up to 48 kHz
- Motion programming in Visual Basic or C/C++/C#

Embedded PC Module with Scalable Performance

- Integrated industrial PC
- Ethernet, USB, VGA, and serial port connectivity
- Operate as stand-alone or control from remote PC
- Easy controller identification with UPnP
- Removable compact flash memory
- PCI expansion slot. Contact factory for details.
- · Windows XPe operating system
- Real time operating systems available upon request

I/O

SynqNet Platform Overview

Launched in 2001, SynqNet is a digital machine control network specifically designed to meet the flexibility, performance, and safety requirements of today's demanding machine control applications. Built on the 100BT physical layer, SynqNet provides a synchronous real-time connection between motion controllers, servo drives, stepper drives, I/O modules, and custom devices.

FAST

- · Network bandwidth for servo updates up to 48 kHz
- Supports up to 32 nodes with 32 axes*
- Over 16,000 bits of digital I/O and 1,000 points of analog I/O
- Real-time diagnostics over SynqNet

SAFE

- "Self-Healing" fault tolerant operation using ring topology
- "HotReplace" allowing replacement of node without network shutdown

PROVEN


- Over 350,000 motion axes installed worldwide
- Multi-vendor interoperable network



Drives and Motors



eZMP Connector Diagram

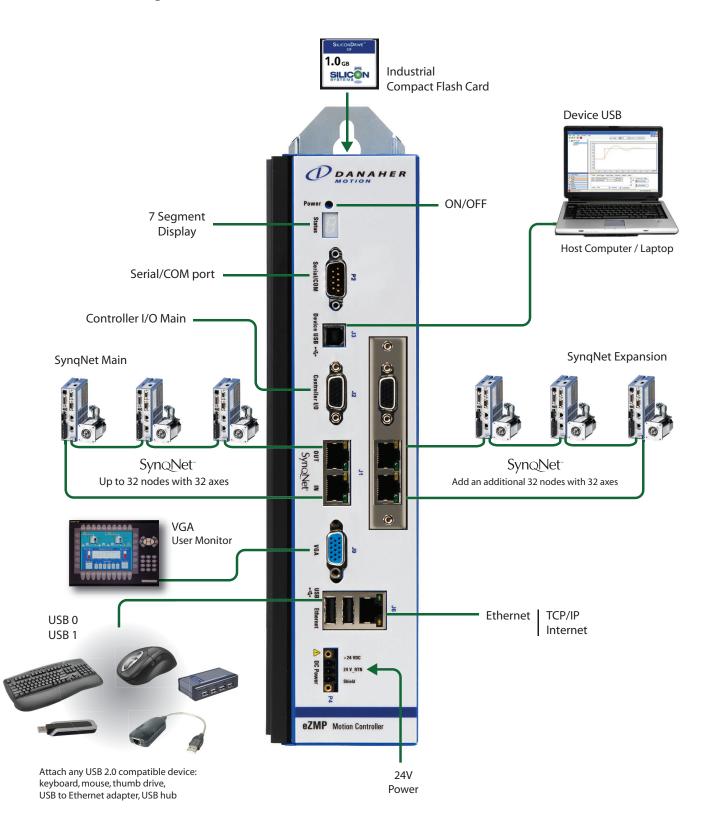

Set up a SynqNet Network

Load Software Install the MPX software suite on the host computer or directly onto the eZMP. Includes the MPX.NET programming library for writing motion applications in Visual Basic and WorkBench software tool for complete system setup and configuration. MPX.NET WorkBench 2 **Connect Hardware** Easy plug-and-play functionality DDANAHEI Operator allows you to quickly setup a I Interface eZMP SyngNet network. Panel S200 Drive AKM Motor Slice I/O (SFD) Ethernet TCP/IP Internet SynqNet[®] Host Computer running WorkBench 24V or via Remote Desktop Power

3

1

Initialize SynqNet Network with WorkBench

WorkBench is a single software tool that allows you to quickly install each drive and I/O node on the SynqNet network. The Drive Setup Wizard for Danaher Motion drive products helps you quickly configure an S200 drive and AKM motor. Appropriate tuning gains and node FPGA are automatically downloaded to the drive. You are now ready to create a motion.



	facros Help	
0000 00 00 00	etupWizard	
Quick Setup		
jæ s2x₽ (10.90.62.98)		Welcome to the S200 Quick Setup The exist using the falsers (20) Thus - The ideal-will be able conjugated to the S200 and
Add New Corbolec.		
O Move		
L Errors		i before you can use i
Scope		
Macros		< Back Nest > Cancel
3 Settings		

4

Create a Motion Application and GUI with MPX.NET Programming Library


Develop a motion application and GUI in the same development environment using the MPX.NET programming library for Visual Basic .NET.

1 🥶 🔛 • 🔜 i	🖉 🕺 🕰 🖄 📓	a 🗄 😫 🔊 - 🕬	- • • • • • • • • •	5 Q	🐨 😒 🛠	3 a	
Form1.vb*	Form1.vb [Design]* 🍸	Start Page Cobject Bro	wser				• ×
🔗 Timer 1			🎽 🍠 Tick				•
	zmp.Notion(0).		encoder counts per 200 ' inches per : 200		2		
e Priv	If zmp.SyngNet		der As System.Obje mitalInBit(0) = Tre				rg
Priv End End Class	If smp.SyngNet End If Sub					False Then	
Priv End End Class	If smp.SyngNet End If Sub	(0).Node(1).Dig				· False Then	>
Priv End End End End End End	If smp.SyngNet End If Sub s	(0).Node(1).Dig				· False Then	
Priv End End End End End End	If zmp.SyngNet End If Sub a Warnings () 0 Mess	(0).Node(1).Dig				· False Then	>

🔡 Cut to Lengti	ı	_ _ _ _ _
MPX Cut 1	fo Length	
Piece Length: # of Pieces:	6.0000 ×	Total Material (in): Total Pieces:
	Zero Counters	🗖 Knife I/O State

www.kollmorgen.com

Enclosure Dimensions

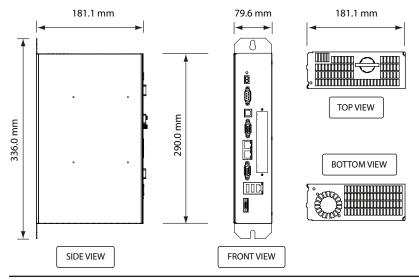

Specifications

Part Numbers

Part Number	Description
T126-0001	eZMP-SynqNet, up to 32 axes

The eZMP's software configuration must also be selected at time of ordering. Please contact Danaher Motion for details.

Function	Parameter	Specification
Processors	ZMP Motion Processor System CPU	5 F F F F F F F F F F F F F F F F F F F
CPU Memory	RAM Compact Flash	
Software	Operating Systems	Windows XP embedded
Servo Loop	Update Rate 4 Axes Update Rate 12 Axes Update Rate 32 Axes Update Rate	Max: 48 kHz Max: 16 kHz
User I/O	Lines Output Low Voltage Input High Voltage (ON) Input Low Voltage (OFF)	Max. 1.0V @ I _{0UT} = 50mA Min. 4.0V Max. 28.8V
Network Interfaces	Ethernet Network SynqNet Network	,
Peripheral Interfaces	VGA Interface Serial Port USB Ports	
PCI Expansion Slot	Additional SynqNet Network Additional PCI Device	
Environment	Operating Temperature Storage Temperature Humidity	-20° C to 85° C
Power Current	Typical Peak	
Power Voltage	Input Power Typical	

USA

Corporate Office

Santa Barbara, CA 33 S. La Patera Lane Santa Barbara, CA 93117 Tel: +1.805.681.3300 Toll Free: +1.800.449.0227 Fax: +1.805.681.3311 Email: info@motioneng.com Website: www.motioneng.com

Technical Support Office

Santa Barbara, CA 33 S. La Patera Lane Santa Barbara, CA 93117 Tel: +1.408.747.0496 Fax: +1.408.747.0498 Email: support@motioneng.com Website: http://support.motioneng.com

EUROPE

Sales Office Wacholderstraße 40-42 40489 Düsseldorf Germany Phone: +49 (0) 203 9979 235 Fax: +49 (0) 203 9979 3314 E-mail: sales.europe@kollmorgen.com

JAPAN

Sales Office Shinagawa INTERCITY Tower B 7F 2-15-2, Konan, Minato-ku, Tokyo 108-6107 Japan Tel: +81.3.5479.7705 Fax: +81.3.5479.8232 Email: kollmorgen_ia@danahermotion.co.jp

KOREA

Sales Office #715, Western Tower II, 867 Janghang-dong, Ilsandong-gu, Koyang-city, Kyunggi-do Korea Tel: +82.31.931.5170 Fax +82.31.931.5176 Email: koreainfo@motioneng.com

CHINA

Tel: +1.400.666.1802 Email: sales.china@kollmorgen.com Beijing|Guangzhou|Shanghai|Shenzhen|Tianjin|Wuhan| Hong Kong

Sales Office

 Rm 2205, Scitech Tower

 22 Jianguomen wai Street

 Beijing, China, 100004

 Tel:
 +86.10.65150260

 Fax:
 +86.10.65150263

R

KOLLMORGEN

Because Motion Matters[™]